

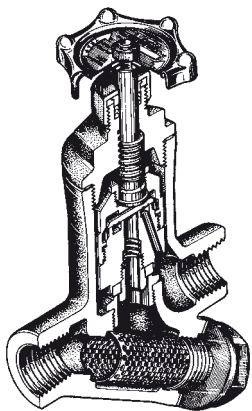





SV




SL3



Capacity Charts

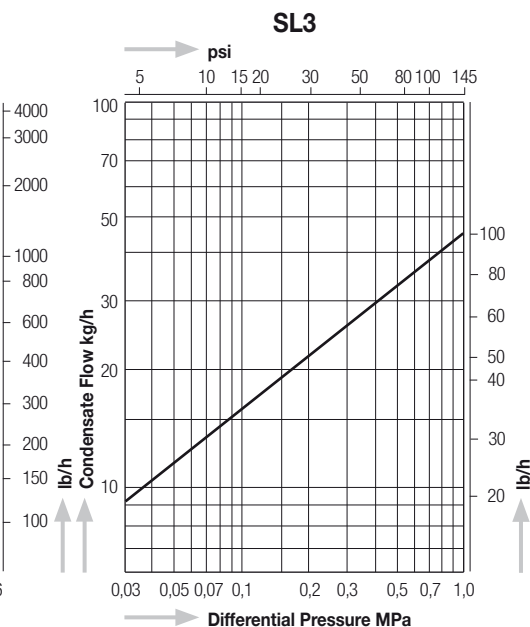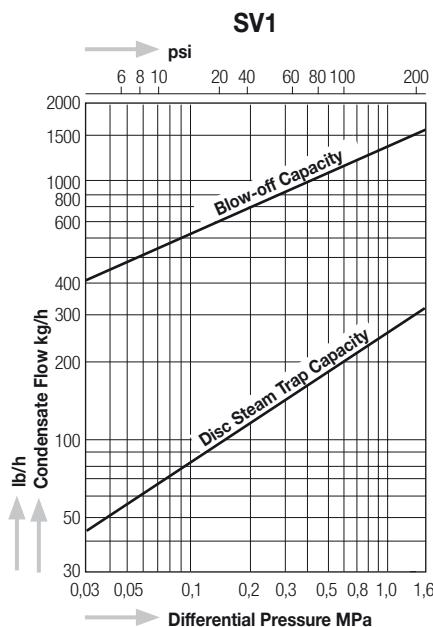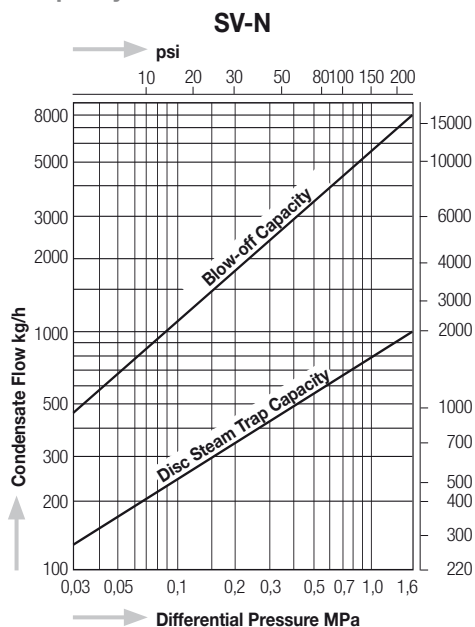

Dimensions

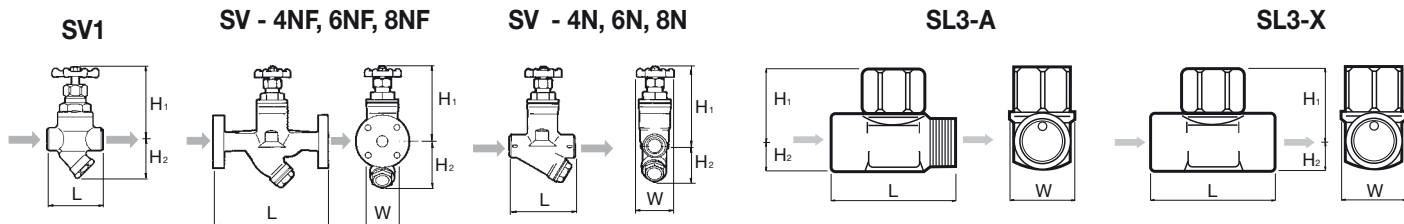

Model	Connections	Size (in)	Operating Pressure Range		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight						
			MPa	psig	°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W		kg	lb					
SV1	Screwed Rc, NPT	3/8", 1/2"	0.03 - 1.6	4.4 - 230	220	428	75	105	53	65	3.0	4.1	2.1	2.6	Cast Steel A216WCB	1,0	2,2					
		107						4.2				1,2				2,6						
SV - 4N 6N 8N 4NF 6NF 8NF	Screwed Rc, NPT	1/2"					0.03 - 1.6	4.4 - 230	220	428	110	60	65	65		4.3	2.4	2.6	Cast Iron FC250	2,4	5,3	
		155										65					65			6.1	2,5	5,5
		120									70	65	65	4.7		2.8	2.6	2,7		5,9		
											220					150		90		65	8.7	5.9
		230									9.1	65	65	9.1		5.9	3.5	2.6		4,7	10,3	
											5,2					11,5						
SL3-A	Screwed Rc, NPT	1/4"					0.03 - 1.0	4.4 - 145	400	752	40	22	8	19		1.6	0.9	0.3	0.7	Stainless Steel SUS416	0,06	0,13
SL3-X	Screwed Rc, NPT	1/4"					0.03 - 1.0	4.4 - 145	400	752	40	22	8	19		1.6	0.9	0.3	0.7		0,06	0,13