

Series 762

Bidirectional Heavy Duty Slurry Valve



Bray / VAAS™

3"-24" (80-600mm) 240psi (16bar)
26"-60" (650-1500mm) 150psi (10bar)


Series 762

Bidirectional Heavy Duty Slurry Valve

The Bray/VAAS Series 762 is a bidirectional heavy duty slurry valve, designed for demanding high pressure slurry applications. Twin elastomer seats and push-through gate design facilitate self-cleaning and prevent media build up.

The durable ductile iron body is offered in a two-piece bolted flange style. When fully open, the valve is full bore, offering no resistance to line media.

- 1 Protective stem cover is standard increasing cycle life in hazardous environments.
- 2 Unique J-ring steel-reinforced, elastomer sleeve design provides energized, zero leakage shutoff in both directions. Retaining rings included as standard throughout the entire size range.
- 3 In the open position, the energized sleeves shield all metal components from direct contact with the flowing process media.
- 4 Robust gate designed for high pressure slurry applications and available in a wide range of corrosion resistant alloys.
- 5 Unrestricted flow path with minimal pressure drop achieved through full port valve design for extended sleeve life.
- 6 Designed with ample clearance for push-through allowing complete gate closure.
- 7 Flanged two-piece bolted body allows for easy maintenance and is drilled and tapped to ASME CL150 flange patterns as standard. Other drilling options available upon request.
- 8 Bottom flush plate with tapped ports provided as standard, allowing for safe discharge of media and easy flush water connection.

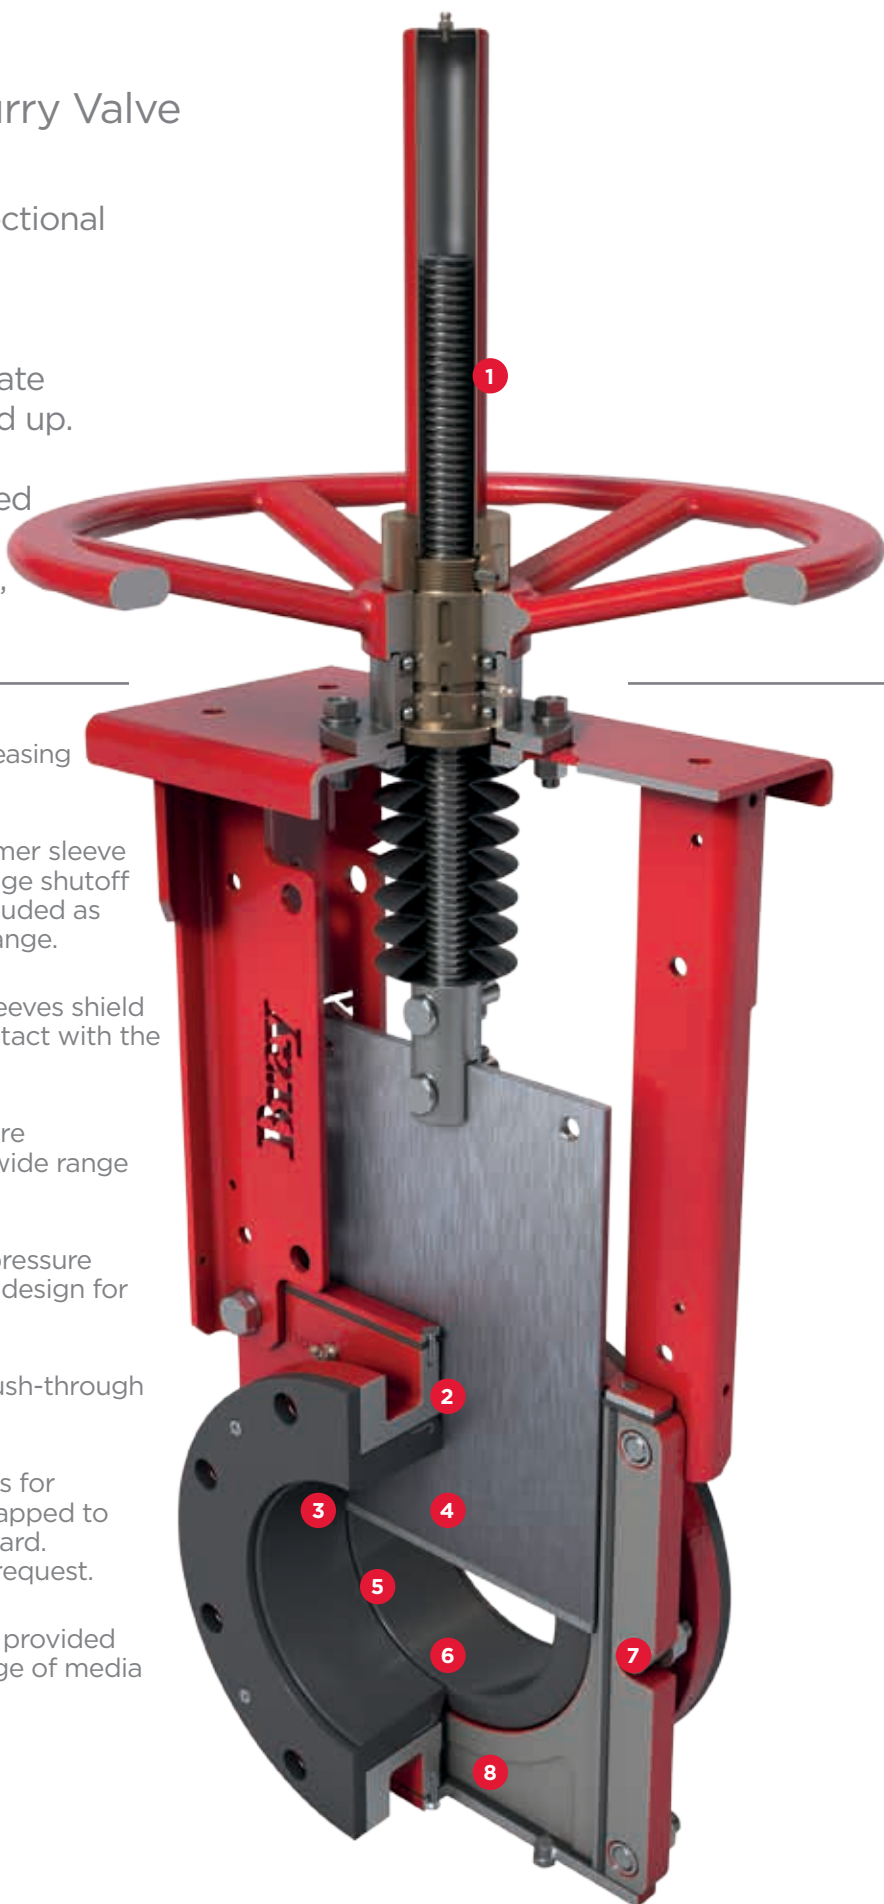

Standard Construction

Body	Gate	Seat	Stem	Wiper Support	Wiper	Topworks
DI	304	Nat. Rubber	304	CS	EPDM	Steel
CF8	304	Nat. Rubber	304	CS	EPDM	Steel
CF8M	316	Nat. Rubber	304	CS	EPDM	Steel

Actuator Options*

Bevel Gear	Standard 10"-24"
Pneumatic	
Hydraulic	
Electric	

*Direct Mounted Handwheel (Standard 2"-8").

Body Options

Carbon Steel (WCB)
CF8 Stainless Steel
CF8M Stainless Steel
CF3M Stainless Steel
SAF 2205 Duplex
SAF 2507 Duplex

Gate Options

304, 316, 317 Stainless Steel
SAF 2507 Duplex
17-4PH Stainless Steel
Hastelloy® C
Monel®
Titanium

Seat Options

Nat. Rubber* -60°-165°F/-51°-74°C
Buna-N -35°-194°F/-37°-90°C
EPDM -65°-248°F/-54°-120°C
Viton® -15°-392°F/-26°-200°C

Additional material options may be available upon request. Consult factory for availability.

*Shore hardness: 60.

Specifications & Standards

Size Range	3" to 60" (80 - 1500mm)
Pressure Rating	Up to 24" (600mm) 240psi (16bar) 26"-60" (650mm-1500mm) 150psi (10bar)
Body Style	Flanged, two-piece bolted


Design	Manufacturer Standard
Testing	MSS SP-81
Face-to-face	Per industry standard
Certification	Canadian CRN
Drilling*	ASME B16.5 CL150, ASME B16.47 CL150

Dimensions

*Additional drilling options available. Consult factory for availability.

In. (mm)	ØA	B	C	D	E	F	ØG	ØH	ØJ	K	L
3 (80)	7.51 (191)	6.88 (175)	8.89 (226)	18.93 (481)	21.41 (544)	21.45 (545)	6.92 (176)	2.44 (62)	2.83 (72)	15.86 (403)	11.81 (300)
4 (100)	9.01 (229)	6.88 (175)	11.02 (280)	21.77 (553)	23.34 (593)	23.97 (609)	9.13 (232)	3.34 (85)	3.89 (99)	16.88 (429)	11.81 (300)
6 (150)	11.02 (280)	7.00 (178)	13.03 (331)	28.03 (712)	31.85 (809)	26.61 (676)	10.31 (262)	5.39 (137)	5.82 (148)	17.91 (455)	19.68 (500)
8 (200)	13.50 (343)	7.28 (185)	15.07 (383)	32.91 (836)	37.24 (946)	35.03 (890)	13.38 (340)	6.88 (175)	7.75 (197)	19.01 (483)	19.68 (500)
10 (250)	16.02 (407)	8.89 (226)	16.57 (421)	38.77 (985)	42.63 (1083)	40.51 (1029)	16.92 (430)	9.09 (231)	9.80 (249)	23.42 (595)	19.68 (500)
12 (300)	19.01 (483)	10.15 (258)	21.02 (534)	47.48 (1206)	47.48 (1206)	45.51 (1156)	16.92 (430)	10.78 (274)	11.53 (293)	25.51 (648)	23.62 (600)
14 (350)	21.10 (536)	10.15 (258)	22.75 (578)	53.34 (1355)	53.34 (1355)	53.46 (1358)	16.92 (430)	12.51 (318)	13.26 (337)	26.41 (671)	23.62 (600)
16 (400)	23.26 (591)	11.02 (280)	24.25 (616)	57.20 (1453)	57.20 (1453)	60.19 (1529)	18.89 (480)	14.01 (356)	14.76 (375)	27.67 (703)	27.55 (700)
18 (450)	25.15 (639)	12.28 (312)	26.53 (674)	66.65 (1693)	66.65 (1693)	67.63 (1718)	18.89 (480)	14.88 (378)	16.77 (426)	30.35 (771)	27.55 (700)
20 (500)	27.28 (693)	14.13 (359)	28.38 (721)	71.96 (1828)	71.96 (1828)	73.50 (1867)	23.62 (600)	16.57 (421)	18.50 (470)	31.29 (795)	27.55 (700)
24 (600)	32.00 (813)	14.64 (372)	33.81 (859)	86.22 (2190)	86.22 (2190)	88.03 (2236)	23.62 (600)	21.22 (539)	23.03 (585)	34.76 (883)	27.55 (700)
26 (650)	34.25 (870)	14.68 (373)	36.77 (934)	--	--	98.22 (2495)	23.62 (600)	23.50 (597)	25.03 (636)	--	--
30 (750)	39.76 (1010)	15.62 (397)	41.49 (1054)	--	--	84.56 (2148)	23.62 (600)	26.77 (680)	29.01 (737)	--	--
36 (900)	46.45 (1180)	18.46 (469)	48.26 (1226)	--	--	130.62 (3318)	23.62 (600)	31.88 (810)	35.03 (890)	--	--
40 (1000)	53.54 (1360)	21.02 (534)	56.53 (1436)	--	--	173.22 (4400)	27.55 (700)	38.26 (972)	40.98 (1041)	--	--
48 (1200)	59.84 (1520)	21.02 (534)	60.62 (1540)	--	--	177.16 (4500)	27.55 (700)	44.09 (1120)	51.77 (1315)	--	--
56 (1400)	67.71 (1720)	21.02 (534)	67.32 (1710)	--	--	183.26 (4655)	27.55 (700)	48.97 (1244)	60.03 (1525)	--	--
60 (1500)	73.03 (1855)	21.02 (534)	76.96 (1955)	--	--	187.00 (4750)	31.49 (800)	57.28 (1455)	60.03 (1525)	--	--

Dimensions given above are indicative. Please request certified drawings for piping layout.

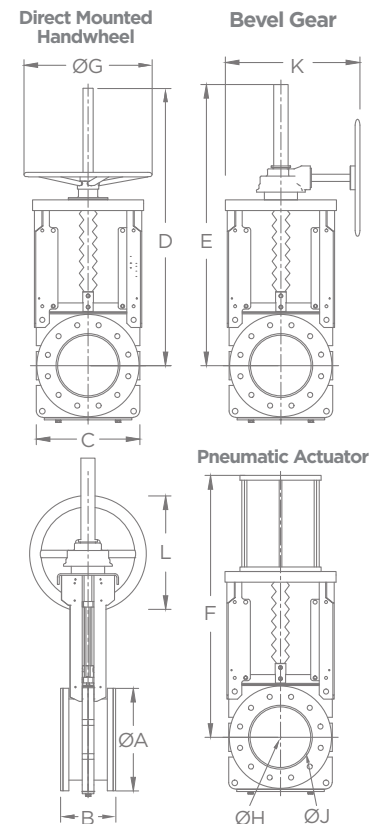

Consult factory for hydraulic and electric actuators dimensions.

Weights

Size (In.)	3	4	6	8	10	12	14	16	18	20	24	26	30	36	40	48	56	60
Weight (lbs)	51	66	99	141	198	375	441	529	573	727	1058	2189	2151	3500	5200	6971	8278	8818
Size (mm)	80	100	150	200	250	300	350	400	450	500	600	650	750	900	1000	1200	1400	1500
Weight (kgs)	23	30	45	64	90	170	200	240	260	330	480	993	976	1588	2359	3162	3755	4000

*Approximate weights shown with bevel gear actuator standard on 10"-24" valves, consult factory for additional configurations.

Bray International, Inc.
Houston, TX, USA +281.894.5454

Bray/VAAS India
Chennai +91.44.2496.1391

Benelux
Heerhugowaard +31.72.572.1410

Brazil
Paulinia Sp-Brazil +55.19.3517.6161

Canada
Montréal +514.344.2729

Chile
Santiago +56.2739.2966

China
Hangzhou, Zhejiang +86.571.828.52200

Colombia
Bogota +571.876.6084

France
Maubeuge +0033.3.27.59.41.89

Germany
Krefeld +49.2151.53360

India
Gujarat +91.2667.664444

Italy
Milano +39.02.9237.0196

Mexico
Zapopan, Jalisco +52.33.3836.4460

Middle East
Dubai +00971.0.4.887.6979

Pacific
Melbourne, Australia +613.9580.9755

Peru
Lima +511.251.0251

Poland
Oswiecim +48.33.842.1968

Russia
Moscow +7.495.36.36.222

Singapore
Ubi Techpark +65.6742.1428

South Africa
Sandton +27.10.007.3222

South Korea
Seoul +82.2.2190.3809

United Kingdom
Inchinnan +44.141.812.5199



To find a distributor in your area visit us online at www.bray.com

All statements, technical information, and recommendations in this bulletin are for general use only. Consult Bray/VAAS representatives or factory for the specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved. Patents issued and applied for worldwide.
Bray® is a registered trademark of BRAY INTERNATIONAL, Inc. © 2015 Bray International. All rights reserved. V-6007_EL_762_06-2016